
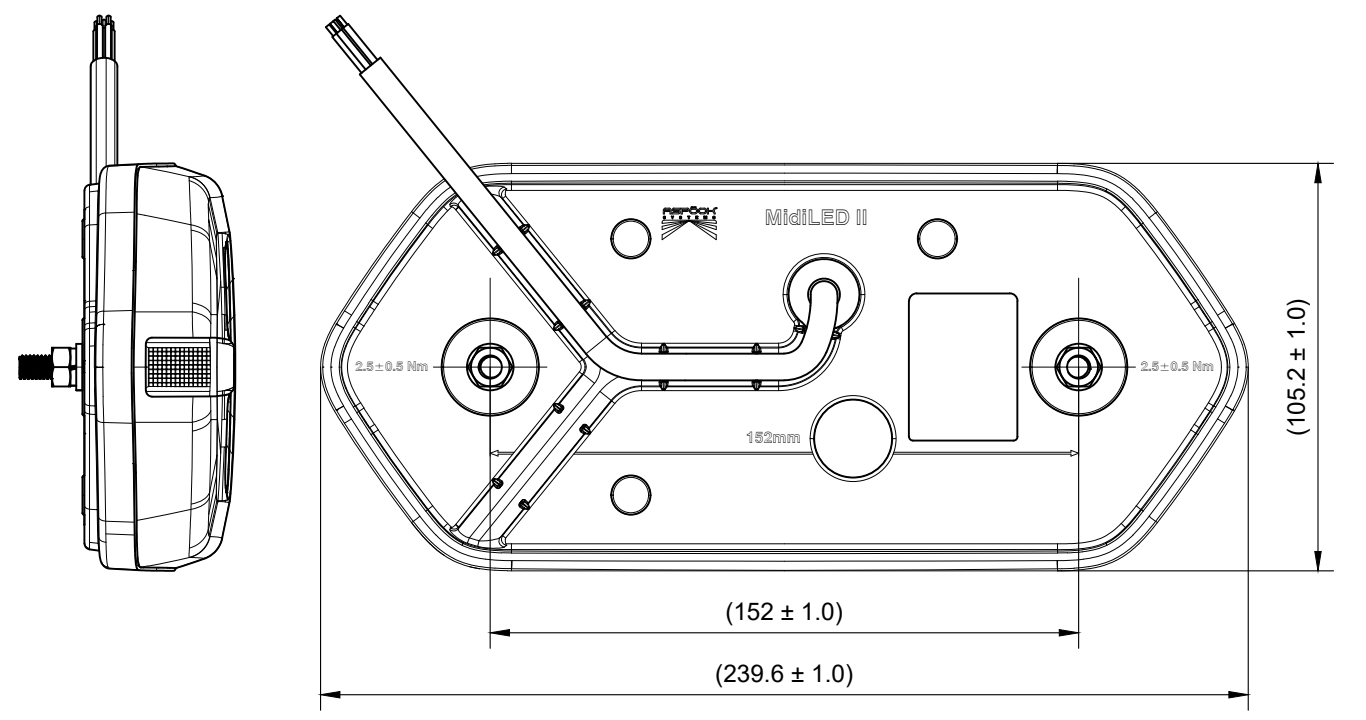



| Level | Zone | ECI N°. | Revision note | Date | Designed | Checked |
|-------|------|---------|---------------|------|----------|---------|
|       |      |         |               |      |          |         |
|       |      |         |               |      |          |         |
|       |      |         |               |      |          |         |
|       |      |         |               |      |          |         |

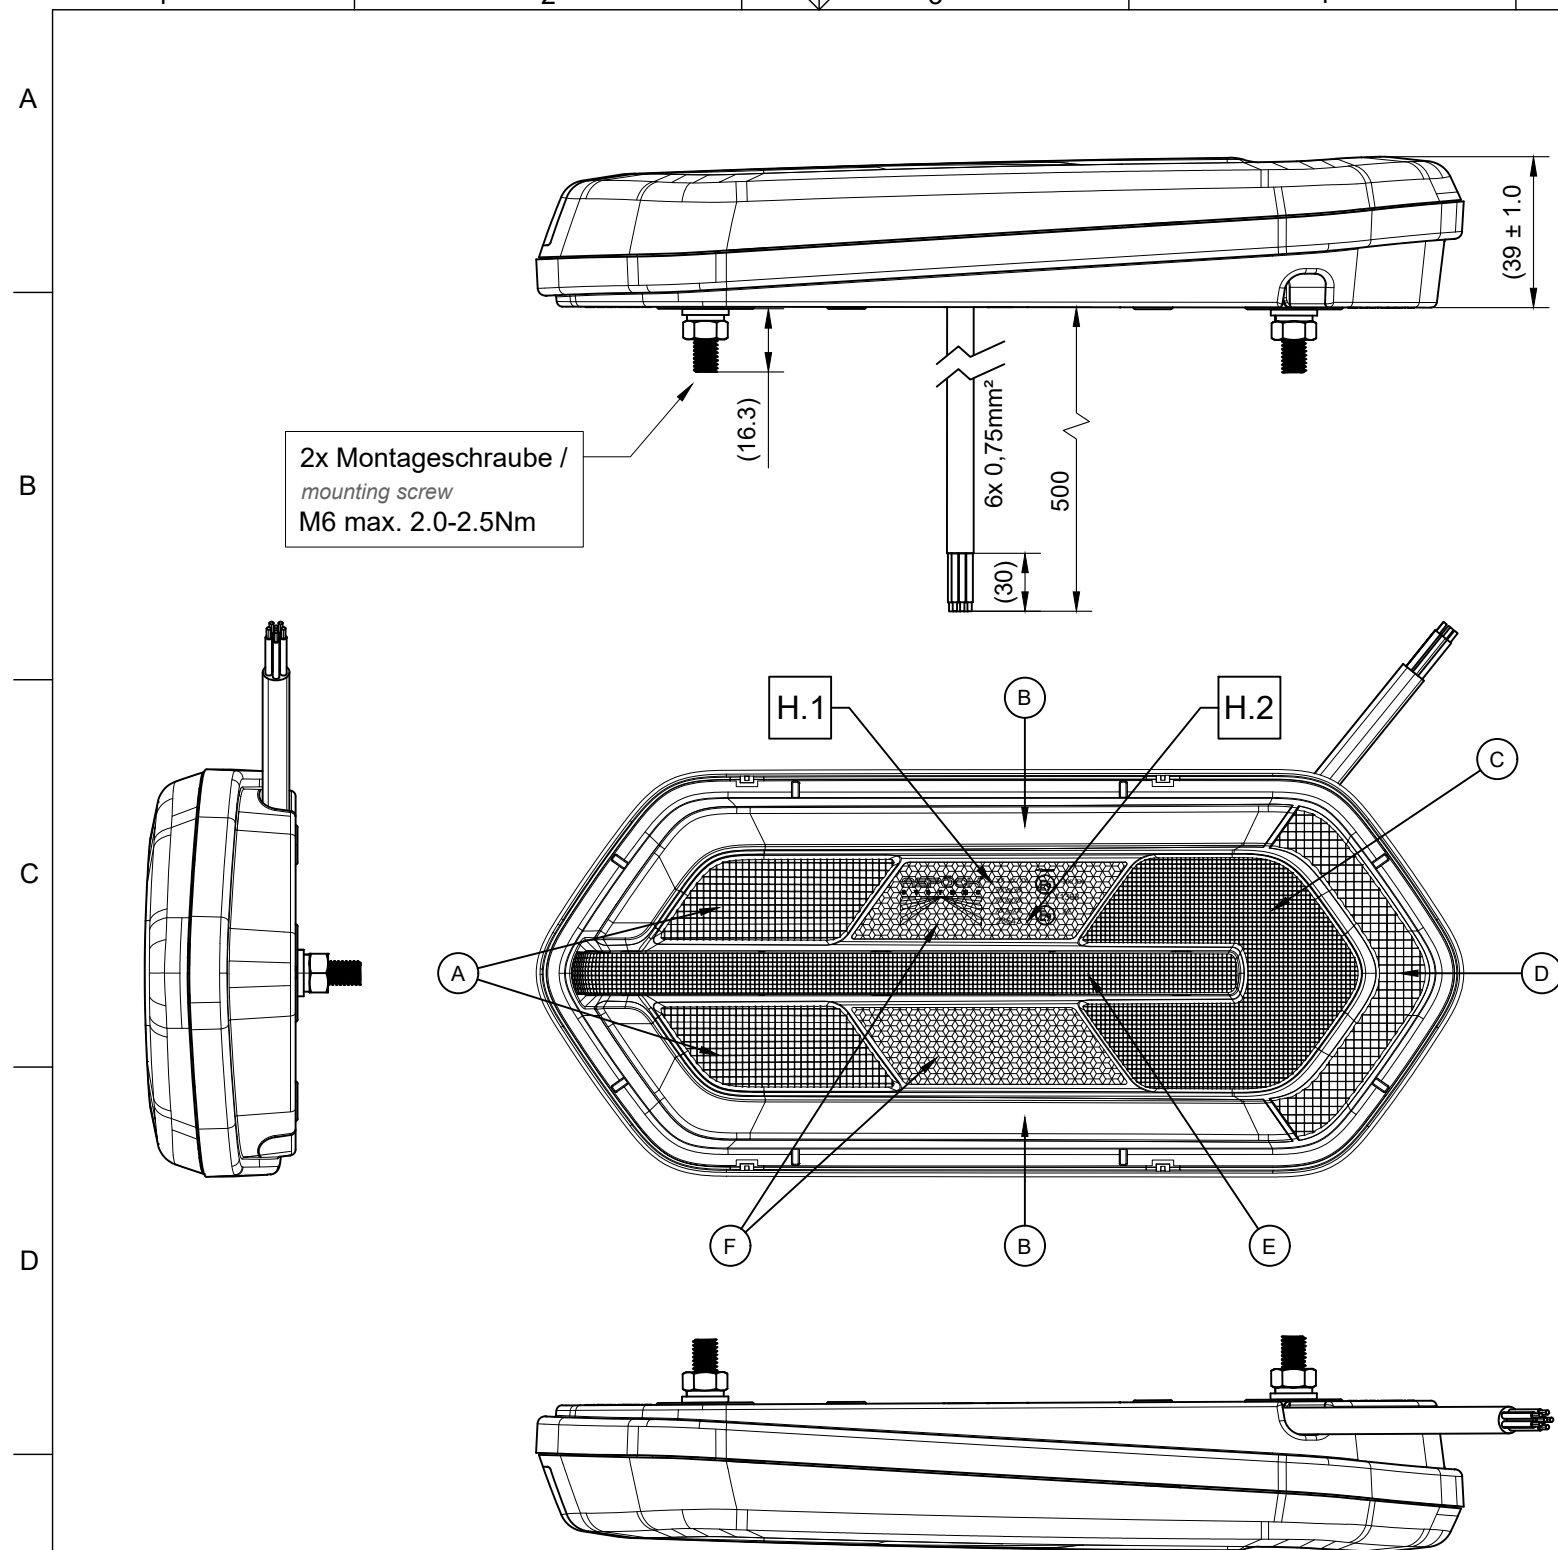

| Electrical Specification |                                   |                                 |                              |                               |
|--------------------------|-----------------------------------|---------------------------------|------------------------------|-------------------------------|
| Funktion<br>Function     | Spannungsbereich<br>Voltage Range | Nennspannung<br>Nominal Voltage | Nennstrom<br>Nominal Current | Nennleistung<br>Nominal Power |
| Volt (V)                 | Volt (V)                          | Volt (V)                        | Ampere (A)                   | Watt (W)                      |
| Tail                     | 9V - 32V                          | 12V / 24V                       | 0.25A / 0.13A                | 3W                            |
| Stop                     | 9V - 32V                          | 12V / 24V                       | 0.15A / 0.08A                | 1.8W                          |
| Progressiv DI            | 9V - 32V                          | 12V / 24V                       | 0.22A                        | 2.5 / 5.3W                    |
| Fog                      | 9V - 32V                          | 12V / 24V                       | 0.38A / 0.19A                | 4.6W                          |
| Reverse                  | 9V - 32V                          | 12V / 24V                       | 0.23A / 0.12A                | 2.8W                          |

Einbaurichtung /mounting direction:  
Der Pfeil muss zur Fahrzeugaußenseite zeigen.  
/The arrow has to point towards the outer vehicle edge.

| Homologation description |             |            |            |    |    |    |       |
|--------------------------|-------------|------------|------------|----|----|----|-------|
| H.1                      | E9<br>11363 | 148R<br>00 | 150R<br>00 | S1 | R1 | 2a | F1 AR |
| H.2                      | E9<br>23643 | 10R<br>06  | IB         |    |    |    |       |



| FUNCTION:                         |   |
|-----------------------------------|---|
| Bremse LED<br>Stop LED            | A |
| Rücklicht LED<br>Tail LED         | B |
| Rückfahr. LED<br>Reverse LED      | C |
| Nebelschl. LED<br>Fog LED         | D |
| Blinker LED<br>Progressive DI LED | E |
| Reflektor<br>reflector            | F |

CP\_03-0\_Bemaßungsrichtlinie ( ) Auxiliary dimension DIN 406-10 Theoretical dimension ISO 1101

○ Test dimension (SPC) [ ] Unfinished dimension DIN 406-10 ✓ Surface quality ISO 1302

Designed by: Hager Cornelia 2023/11/22

Checked by: Wetzlmaier Gerlinde 2023/11/27

Approved by: Geisberger Markus 2023/11/27

Part Number: 34-3824-067

ASPOCK SYSTEMS

Designation: MidiLED II Dualvoltage Cable EMC

Drawing Nr. 34382406

Business Unit SALES - 12

Tolerance: CP\_04-2\_Toleranzen Verkabelungsprodukte

Project number: 1215

Weight: -

Scale: not in scale

Level: R01

Sheet: 1 / 1

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.