

F


E

D

C

B

A

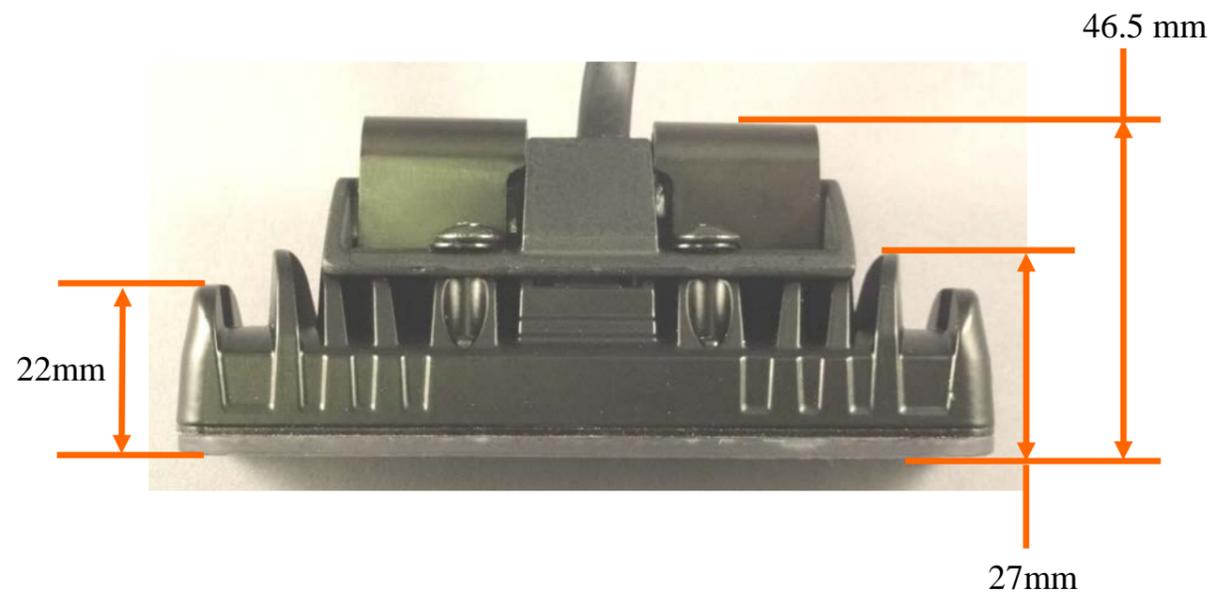

LED has the following flash patterns:

FP#	FLASH PATTERNS	FP#	FLASH PATTERNS
0	Random	12	Single-Quad (split)
1	Single (2Hz)	13	Single H/L (split)
2	Double (2Hz ECE65)	14	Single (all)
3	Triple (2Hz)	15	Double (all)
4	Quad (2Hz)	16	Quad (all)
5	Random	17	Quint (all)
6	Single (split)	18	Mega (all)
7	Double (split)	19	Ultra (all)
8	Quad (split)	20	Single-Quad (all)
9	Quint (split)	21	Single H/L (all)
10	Mega (split)	21	Steady 2 (California)
11	Ultra (split)	23	Steady 4 (all)

LED's has the functionality to be synchronised into alternate or simultaneous flash with other same model LED's.

LED operates at 12-24VDC.

LED is supplied in a white box.

LED is supplied with generic fitting instructions.

LED cable length is 950mm.

LED is supplied with Adhesive mount, Screw mount, and Bracket mounting components:

- x2 adhesive pads
- x2 self-tapping mount screws
- x2 machine screw type mount screws
- x2 locking washers
- x1 rubber pad
- x1 mounting bracket
- x1 lighthouse base

	ECE65 APPROVED	MOD No	ISS	DATE	DRAWN	TITLE			
	2009/109 EMC APPROVED	38875	A	18/10/12	G.MATTHEW	CUSTOMER DRAWING AMBER LED UNIT			
					DATE	PART No	Sht No	PREMIER HAZARD LTD BESSINGBY INDUSTRIAL ESTATE BRIDLINGTON EAST YORKSHIRE YO16 4SJ	A 3
				18/10/12	CHECKED SEE ENG REL SHT		LL093-003		
							of	1	